


KISTRON WIRE

The solution provider in Wire & Cable industries



Welcome to the world of Kistron's special wires

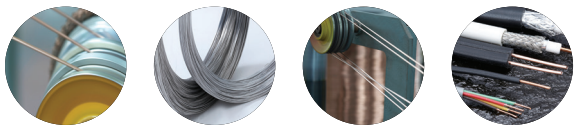


History


- | | |
|-------|---|
| 1982. | Sam-A Electronics Ind. founded |
| 1998. | Quality ISO 9001 Certified |
| 2000. | Environmental ISO 14001 Certified |
| 2007. | Export prize for \$30 Mil. |
| 2008. | Samatron (Dongguan) in China founded |
| 2008. | Jun. Becoming a subsidiary of Kiswire group |
| 2011. | Dec. 'World 1st Class Product' qualified by Korean government |
| 2013. | Jan. Renamed as Kistron Co., Ltd. |
| 1982. | 삼아전공사 설립 |
| 1998. | ISO 9001(품질) 인증 |
| 2000. | ISO 14001(환경) 인증 |
| 2007. | 3천만불 수출의 탑 수상 |
| 2008. | 중국 동관공장 설립 |
| 2008. | 6월. 고려제강(주) 합병 |
| 2011. | 12월. 세계일류화 상품 선정 |
| 2013. | 1월. 키스트론(주) 사명변경 |

Contents

Lead Wire	4
Aluminum Wire	6
Copper Covered Steel Wire for Cables	8
Hot-dipped Lead Wire	10
Guitar Wire	12
Tinned Copper Tape for Shielding Cables	13
Tinned Brass Square Wire	14
Quality Assurance	14

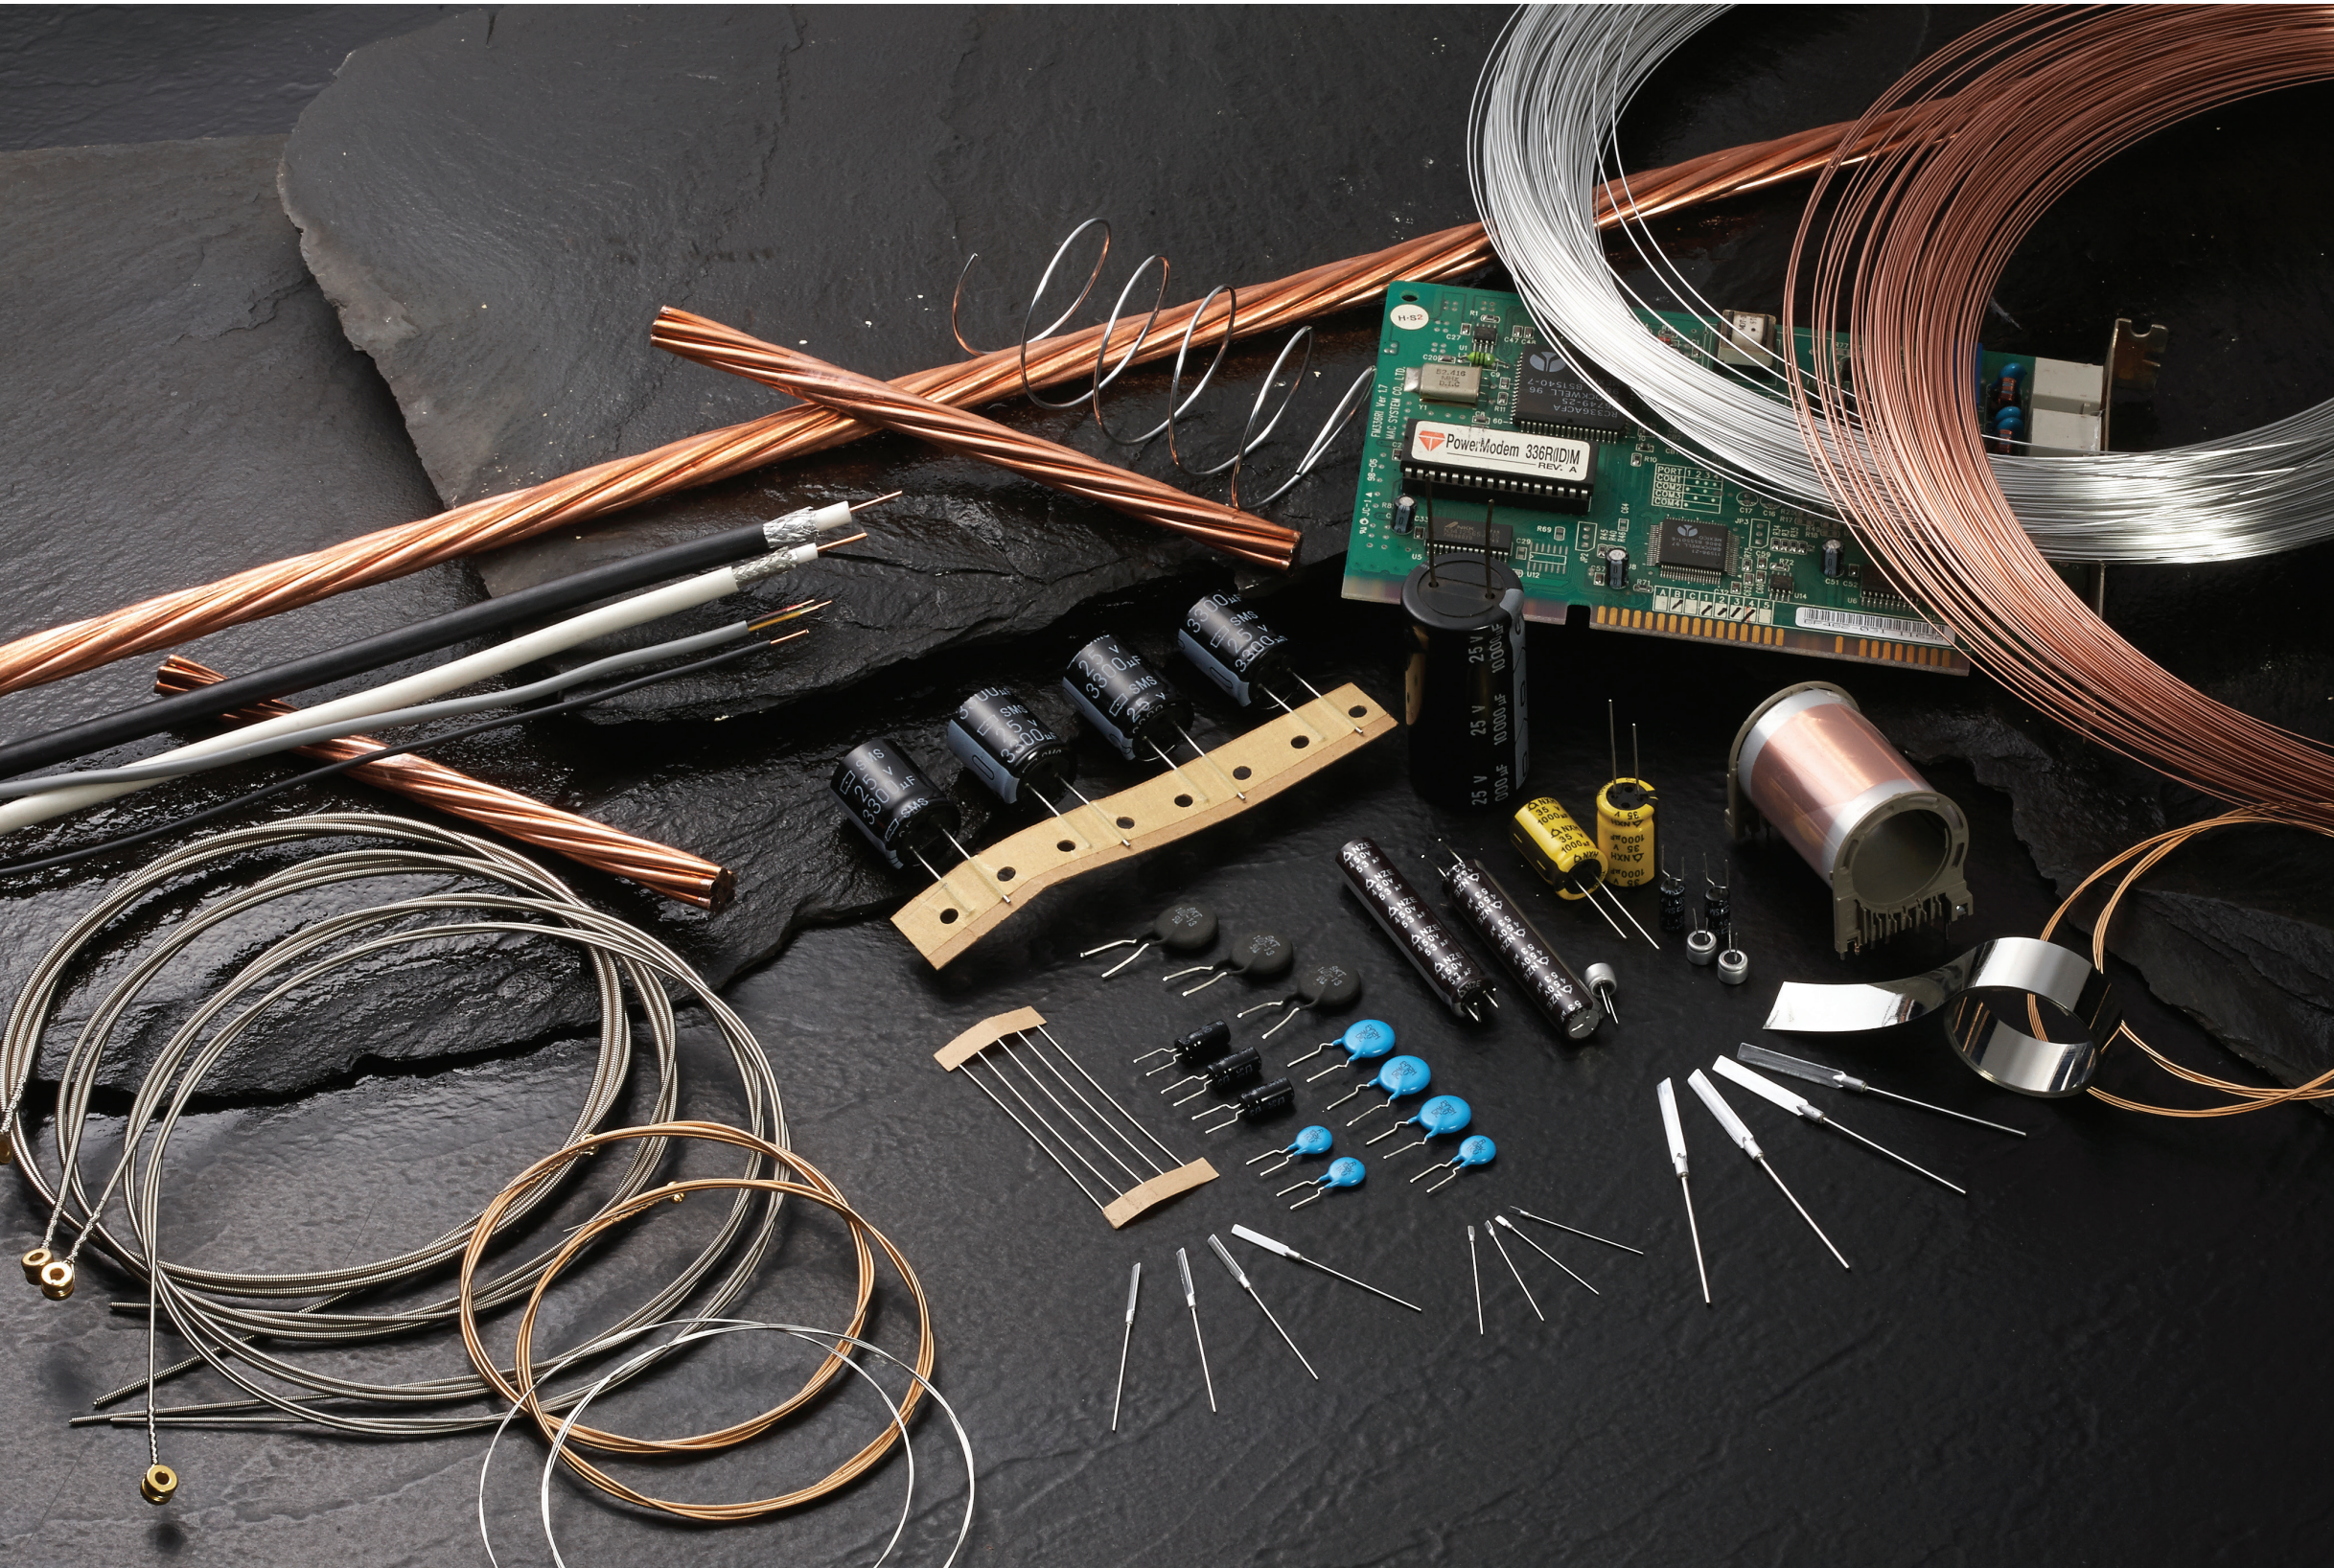

Lead Wire

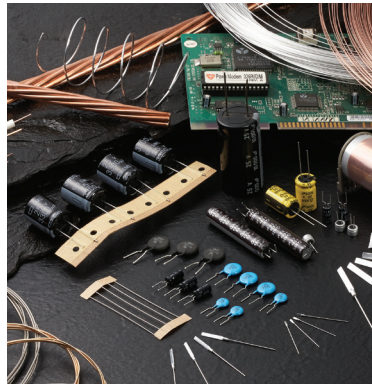

Lead wire for interconnecting main electronic components with PCB board in order to activate each component with electrical & physical properties.

+ Application Capacitors (Electrolytic, Polymer Solid, Film, Ceramic), Resistor, Diode, Varistor, Jumper, Connector pin.

주요 전자부품과 PCB 기판을 연결함으로써 각 부품의 원활한 기능을 위한 전기적, 물리적 특성을 갖춘 인입선.

+ 용도 콘덴서(전해, 고분자, 필름, 세라믹), 저항, 다이오드, 바리스타, 점퍼, 커넥터핀용.

Wire Specification

Item	Plating Material	Base Material	Diameter (mm)	Plating Thickness(μm)	Conductivity (%)	Tensile Strength(kgf/mm ²)	
						Soft	Hard
TPC	Sn 100%	CP	0.26-1.5	Max. 14	15-53	Max. 45	44~62
TCA		Cu	0.26-1.5	Max. 14	Min. 90	Max. 28	Max. 35
TCO		OFC	0.26-1.5	Max. 14	Min. 90	Max. 28	Max. 35
TSBC		SBC*	0.26-1.0	Max. 14	Min. 90	Max. 28	Max. 35
TPC(B)	Sn+Bi	CP	0.26-1.5	Max. 14	15-53	Max. 45	44~62
TCA(B)		Cu	0.26-1.5	Max. 14	Min. 90	Max. 28	Max. 35
TCO(B)		OFC	0.26-1.5	Max. 14	Min. 90	Max. 28	Max. 35
TPC(C)	Sn+Cu	CP	0.26-1.5	Max. 14	15-53	Max. 45	44~62
TCA(C)		Cu	0.26-1.5	Max. 14	Min. 90	Max. 28	Max. 35
TCO(C)		OFC	0.26-1.5	Max. 14	Min. 90	Max. 28	Max. 35
APC	Ag	CP	0.26-0.8	Max. 10	15-53	Max. 45	44~62
ACA		Cu	0.26-0.8	Max. 10	Min. 98	Max. 28	Max. 35
ACO		OFC	0.26-0.8	Max. 10	Min. 98	Max. 28	Max. 35
ASBC		SBC	0.26-0.8	Max. 10	Min. 98	Max. 28	Max. 35
NPC	Ni	CP	0.26-1.0	Max. 10	15-53	Max. 45	44~62
NCA		Cu	0.26-1.0	Max. 10	Min. 90	Max. 28	Max. 35
NCO		OFC	0.26-1.0	Max. 10	Min. 90	Max. 28	Max. 35
CPS	Cu	Fe	0.26-1.5	*	15-53	Max. 45	44~62

※ SBC : Silver Bearing Copper.

※ CPS's plating thickness depends on wire diameter.


※ Any specification except the above is negotiable.

Cross Section of Wire

Item	Cross Section	Item	Cross Section
Tin Plated on Copper Covered Steel Wire TPC		Sn+Bi Plated on Copper Covered Steel Wire TPC(B)	
Sn+Cu Plated on Copper Covered Steel Wire TPC(C)		Tin(or Sn+Cu) Plated on Copper Covered Square Steel Wire TPC(HS, TPC(HS)(C)	
Tin Plated on Annealed Copper Wire TCA		Sn+Pb(Sn+Bi or Sn+Cu) Plated on Annealed Copper Wire 5TCA, TCA(B), TCA(C)	
Ag Plated on Copper Covered Steel Wire APC		Ni Plated on Copper Covered Steel Wire NPC	

Packing

Type	A	B	C	D
Material				
	Paper Box	PVC Drum	P.P Drum	Fiber Drum
Dimension (mm)	280(L) X 280(W) X 265(H)	Ø250 X 285(H)	Ø290 X 320(H)	Ø400 X 290(H)
Weight (kg)	13~22			35~50

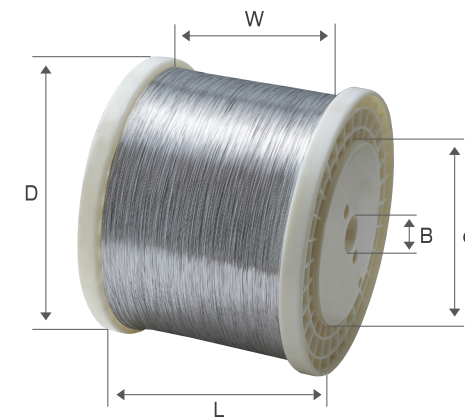

Bobbin Type	Dimension (mm)					Packing Weight (kg)
	D	d	B	W	L	
D-250	250	160	22	160	200	20
P-30	300	130	32	130	150	30
P-5	160	70	22	90	114	5

※ Any packing requirement except the above is negotiable.

Aluminum Wire



High purity Aluminum wire with over 99.90% purity level.

+ **Application** Electrolytic capacitor, Polymer solid capacitor, Rivet for high-voltage capacitor, Film deposition, Accessories, Flowering.

전해콘덴서 및 기타 부품용 고순도 Al wire.

+ **용도** 전해콘덴서, 고분자 콘덴서, 고압콘덴서용 리벳, 필름 증착용, 액세서리, 화훼용.

Aluminum Wire for Lead Tab

Chemical Composition

Purity (%)	Si	Fe	Cu	Mn	Cr	Zn	Ti	Al
99.99	Max. 0.005	Max. 0.005	Max. 0.005	-	-	-	-	99.99 over
99.92	Max. 0.05	Max. 0.07	Max. 0.01	Max. 0.01	-	-	Max. 0.01	99.92 over
99.90	Max. 0.05	Max. 0.07	Max. 0.01	Max. 0.01	-	-	Max. 0.01	99.90 over

Wire Specification

Item Diameter (mm)	99.99%		99.92%		99.90%	
	Tensile Strength (kgf/mm ²)	Conductivity (%)	Tensile Strength (kgf/mm ²)	Conductivity (%)	Tensile Strength (kgf/mm ²)	Conductivity (%)
0.6~1.5	Min. 10	Min. 63	16~22	Min. 61	16~22	Min. 61
1.9~2.5			14~19		14~19	

※ Any specification except the above is negotiable.

Packing

Type	A		B
Wire Diameter (mm)	0.65~1.5	1.6~2.5	0.65~2.5
Material			
	Paper Box		Fiber Drum
Dimension (mm)	400(L) X 410(W) X 320(H)		Ø430 X 580(H)
Weight (kg)	10 X 3EA=30	20 X 1EA=20	50 X 1EA=50
	15 X 2EA=30	10 X 2EA=20	

※ Any packing requirement except the above is negotiable.

Aluminum Rod for Making High Purity Alumina

+ **Application** LED Substrate, Secondary battery membrane.

+ **용도** LED 기판용, 2차 전지 분리막용.



Chemical Composition

Purity (%)	Si	Fe	Cu	Mn	Cr	Zn	Ti	V	Al
	Na	Ni	Ca	Ga	Cr	Zr	K		
99.995	0.00028	0.0004	0.00047	0.00003	0.00029	0.00017	0.00006	0.00006	99.995 over
	0.00004	0.00003	0.00001	0.00003	0.00002	0.00003	0.00005		

※ Any specification except the above is negotiable.

※ Any packing requirement is negotiable.

Copper Covered Steel Wire for Cables

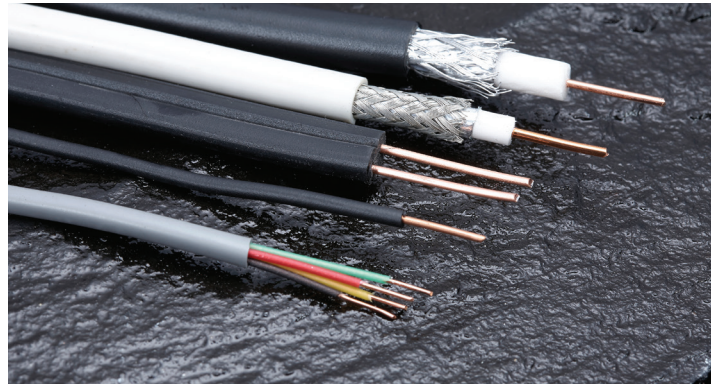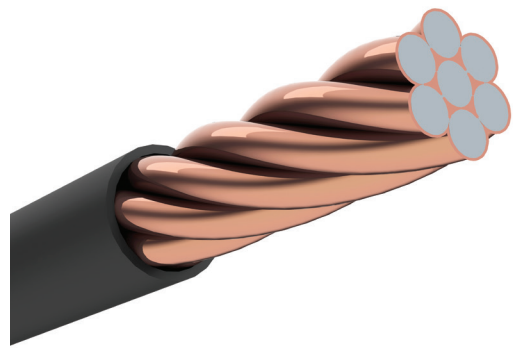

+ Application Special conductors of cable wires having electric and physical properties defined by International Standard such as ASTM, BS.

+ 용도 국제규격(ASTM, BS)에 따른 전기적, 물리적 특성을 갖춘 케이블용 도체.


Wire Specification

Application		Telecommunication*	Electricity	Harness
Item				
Diameter(mm)		0.5~2.59	1.0~4.1	0.1~1.0
Tensile Strength (kgf/mm ²)	Soft	35~45	Min. 35	Min. 35
	Hard	87~100		
	Extra Hard	Min. 110	-	-
Conductivity(%)		18~53	18~53	18~53
International Standard		ASTM B-227 B-452 B-869 B-910 BS 4087	ASTM B-217 B-910	ASTM B-227 B-452 B-910

※ Telecommunication applications have Drop wire, Coaxial, Detonator and Ground tracer cables.

※ Any specification except the above is negotiable.


Packing

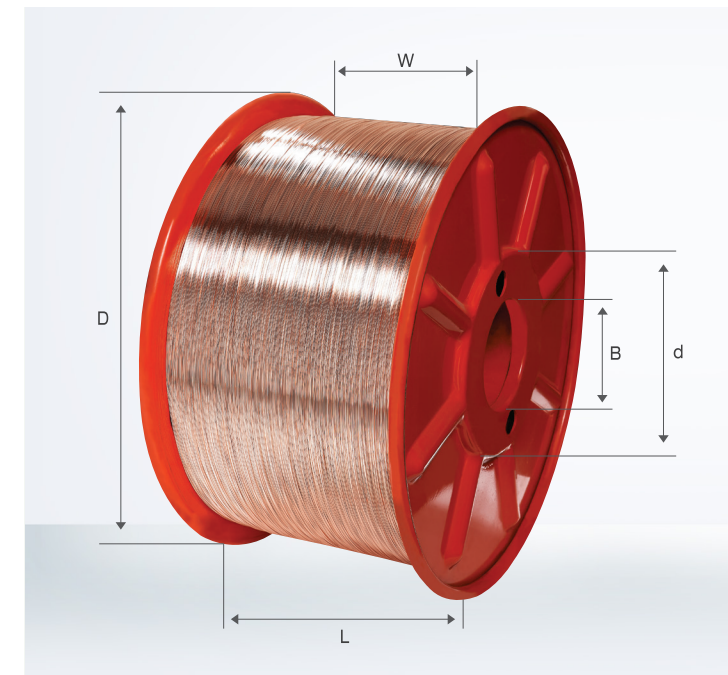

Bobbin Type	Dimension (mm)					Packing Weight (kg)
	D	d	B	W	L	
800kg Steel	750	320	130	500	520	800
500kg Steel	580	267	130	450	474	500
300kg Steel	580	265	130	306	320	300

※ Any packing requirement except the above is negotiable.

Hot-dipped Lead Wire

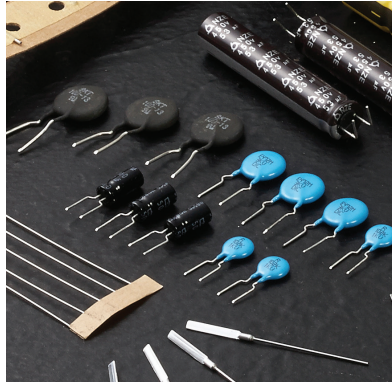


Hot-dipped type lead wire having proved whisker-free solution and heat-resistance properties with tight tolerance of coating thickness on a wire.

+ **Application** High voltage capacitor, Ceramic capacitor and other special usage.


Whisker-free 특성과 함께 강한 내열성을 가진 도금두께가 균일한 용융도금 리드와이어.

+ **용도** 고전압 콘덴서, 세라믹 콘덴서 및 다양한 부품용.

Tight Tolerance of Coating Thickness



Base : CP Wire




Base : Copper Wire

Wire Specification

Item	Plating Material	Base Material	Diameter (mm)	Plating Thickness (μm)	Conductivity (%)	Tensile Strength (kgf/mm ²)	
						Soft	Hard
HPC	Sn	CP	0.4-1.0	8, +3/-2	21-53	Max. 45	44-62
HCA		Cu	0.4-1.0	8, +3/-2	Min. 90	Max. 28	Min. 28
HPC(C)	Sn+Cu	CP	0.4-1.0	8, +3/-2	21-53	Max. 45	44-62
HCA(C)		Cu	0.4-1.0	8, +3/-2	Min. 90	Max. 28	Min. 28

※ Any specification except the above is negotiable.

Packing

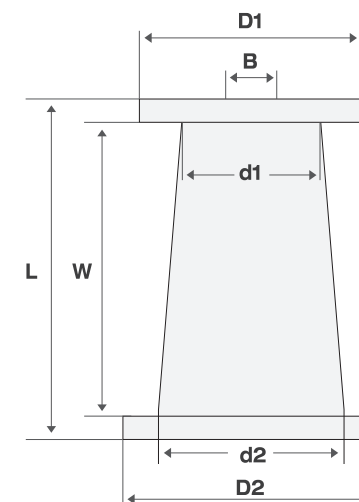

Bobbin Type	Dimension (mm)							Packing Weight (kg)
	D1	D2	d1	d2	B	W	L	
PT-25	215	230	110	130	32	250	280	25

※ Any packing requirement except the above is negotiable.

Guitar Wire



Special wire with physical properties for various Guitar strings.

+ Application Strings for Acoustic guitar, Electric and Bass guitar.

다양한 Guitar String에 사용되는 물리적 특성을 갖춘 와이어.


+ 용도 어쿠스틱, 일렉트릭, 베이스 기타 스트링용.

Wire Specification


Item Type	Applied Part	Plating Material	Base Material	Shape	Diameter		Tensile Strength (kgf/mm ²)
					mm	inch	
Acoustic	Single	Sn	Fe	Round	0.2 - 0.6	0.0078~0.0236	240~301
	Core	Sn	Fe	Hexagon	0.25-0.5	0.0098~0.0196	
	Wrap	-	Bronze	Round	0.12 - 0.6	0.0047~0.0236	40~70
Elec/Bass	Single	Sn	Fe	Round	0.2 - 0.4	0.0078~0.0236	240~301
	Core	Sn	Fe	Hexagon	0.25 - 0.5	0.0098~0.0196	
	Wrap	Ni	CP	Round	0.12 - 0.6	0.0047~0.0236	50~80

※ Any specification except the above is negotiable.

Packing

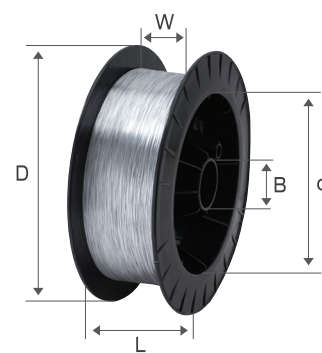

Single / Core Wire

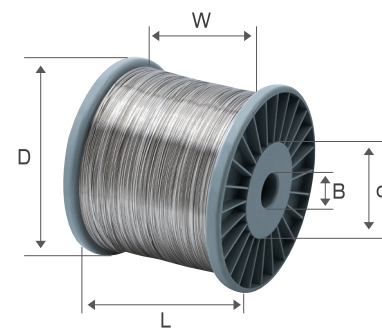

Wrap Wire

Item Application	Bobbin Type	Dimension (mm)					Packing Weight (kg)
		D	d	B	W	L	
Single / Core	SD-300	300	210	52	90	102	30
Wrap	P-3	130	60	21	90	110	3
	P-4	160	90	21	90	114	4

※ Any packing requirement except the above is negotiable.

Tinned Copper Tape for Shielding Cables



With special heating process Tinned Copper Tape is able to achieve the features of anti-corrosion, electromagnetic shielding and required hardness.

+ Application Nuclear power cable and other high-voltage power cable with electromagnetic shielding property.

내부식성, 노이즈 예방을 위한 특수 열처리한 표면도금층으로 내마모성, 경도 향상시킨 제품.

+ 용도 원자력용 케이블 및 기타 고압전력선 등에 차폐용으로 사용되는 주석도금 테이프.

Tape Specification

Item	Dimension (mm)		Plating Thickness (μm)	Tensile Strength (kgf/mm ²)
	Thickness	Width		
Cu	0.07~2.0	1.0~100	0.5~5	Max. 28
OFC				

※ Any specification except the above is negotiable.


Tinned Brass Square Wire

With excellent ductility and cold-forging property for the application of connector pins defined by JIS H3260

JIS H3260에 따른 커넥터 핀용으로 전연성, 냉간 단조성이 우수한 주석도금 황동선

Wire Specification

Item	Composition(%)			
	Cu	Pb	Fe	Zn
C2600W	68.5~71.5	Max. 0.05	Max. 0.05	31.4~28.4
C2700W	63.0~67.0	Max. 0.05	Max. 0.05	36.9~32.9



Plating Thickness(μm)		Base Material	Dimension (mm)				Tensile Strength(kgf/mm ²)			
Underlayer	Outlayer		Gauge	Width (W)	Opposite Angle (O/A)	Edge Radius(R)	1/4H	1/2H	3/4H	H
Ni	Sn									
0.7~1.6	1.5~2.6	Brass wire	0.5 □*	0.50±0.007	0.67±0.03	0.0418				
			0.6 □	0.60±0.007	0.80±0.03	0.0556				
			0.64 □	0.64±0.007	0.85±0.03	0.0635				
			1.14 □	1.14+0.002/-0.017	1.46±0.03	0.1807				

※ □ is Square.

※ Any specification except the above is negotiable.

※ Any packing requirement is negotiable.

Kistron
A value creator,
beloved &
respected by
customers



With the best technology
& service
Customers will be rewarded

COPYRIGHT(C)2014 KISTRON CO., LTD.
ALL RIGHTS RESERVED



주사 전자 현미경
Scanning Electron Microscope



에너지 분산형 X선 형광 유해물질 분석기
ED-XRF Hazardous Substance Spectrometer




유도결합플라즈마 분석기
Inductively Coupled Plasma Spectrometer



발광 분광 분석기
Spark Optical Emission Spectrometer



XRF 도금두께 측정기
XRF Coating Thickness Gauge

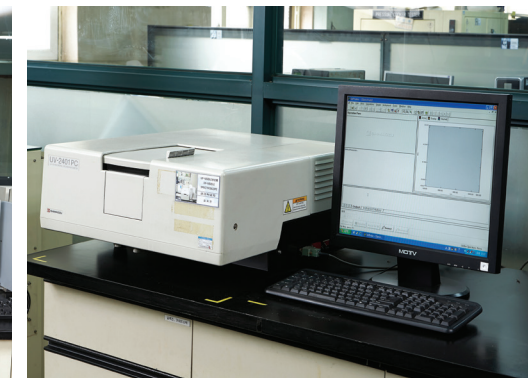

자외선-가시광선 분광광도계
Ultraviolet-Visible Spectrophotometer

Head Office & 1st Plant
Kistron Co., Ltd.



2nd Plant
Kistron Co., Ltd.



China 3rd Plant
Kistron(Dongguan) Co., Ltd.



Kiswire Ltd.

20, Gurak 123 Rd, Suyeong-gu, Busan, Korea 613-701

Tel +82 51 760 1700 Fax +82 51 757 7379

www.kiswire.com



Kistron Co., Ltd.

37, Sandan 68 Rd, Danwon-gu, Ansan, Korea 425-852

Tel +82 31 491 6501 Fax +82 31 491 2266

www.kistron.com